


## NH5S

### Charging Hose Set w/o Ball Valve

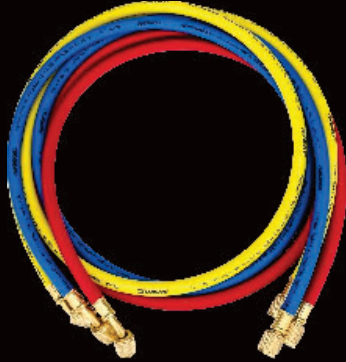

## NH5R

## NH5B

## NH5Y


## NH5L

### Individual Charging Hose w/o Ball Valve



## NH5SC

### Charging Hose Set with Ball Valve

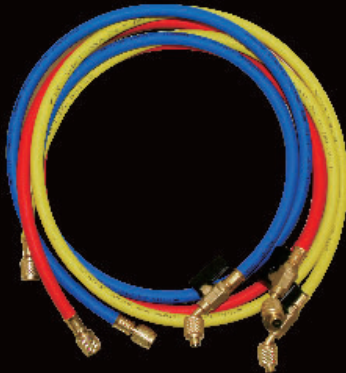

## NH5CR

## NH5CB

## NH5CY

### Individual Charging Hose with Ball Valve



## 1/4" Color Hoses, 5 Ft Long

#### Main Features for All Models

- Suitable for R-410A, R-134a, R-22 and other refrigerants
- 1/4" SAE fittings with 45° bend on one end
- Leak-proof eight-sided crimp
- 800 psi working pressure, 4000 psi burst pressure
- Universal, replaceable gasket
- Adjustable depressor

#### Ball Valve Models

- Ball valve for reduced refrigerant loss
- Metal valve handle

#### NH5L

- Reverse threaded for A2L



The valve core depressor can be adjusted up or down to optimize its access to valve core. Use a valve core depressor adjuster to turn the depressor. To lower, turn clockwise; to raise, turn counterclockwise.



| Model          |     | NH5S               | NH5R | NH5B | NH5Y   | NH5L   | NH5SC             | NH5CR | NH5CB | NH5CY  |
|----------------|-----|--------------------|------|------|--------|--------|-------------------|-------|-------|--------|
| Color          |     | Red, Yellow, Blue  | Red  | Blue | Yellow | Orange | Red, Yellow, Blue | Red   | Blue  | Yellow |
| Quantity       | pc  | 3                  | 1    | 1    | 1      | 1      | 3                 | 1     | 1     | 1      |
| Ball Valve     |     | Without ball valve |      |      |        |        | With ball valve   |       |       |        |
| Pressure Scale | psi | 0-800 psi          |      |      |        |        |                   |       |       |        |
| Length         | ft  | 5                  |      |      |        |        |                   |       |       |        |
| Connector      | in  | 1/4" - 1/4"        |      |      |        |        |                   |       |       |        |

**1-YEAR WARRANTY**